


Fuel Pressure Gauge Instructions
 Digital Series ONLY



Wire Color Code				
Black	Engine Ground		Green	Fuel Pressure Sender Wire
Red	12v Ignition Switch (+)		Orange	Optional Headlamp 12v (+)

1. Disconnect the negative battery cable.
2. Connect the fuel pressure sending unit to the fuel system (Preferably at the fuel rail).
3. Connect the orange wire to the head lamp switch to dim the gauge when the headlamps are turned on.
4. Connect the red wire to 12 volt switched source. When wiring this connection install a 3 amp fuse within 20 inches of the source. For easy installation in the fuse panel you can get an “add a circuit” which looks like a fuse with an additional wire attached; this is available at a local auto parts store.
5. The green wire needs to be connected to the “G” post of the sender.
6. Connect the Black Wire need to be connected to any ground connection, or you can run a wire to the negative side of the battery. The “M” post needs to be connected to a good ground as well. If it does not have a good connection then it will read full pressure on the gauge.
7. Reconnect the negative battery cable.

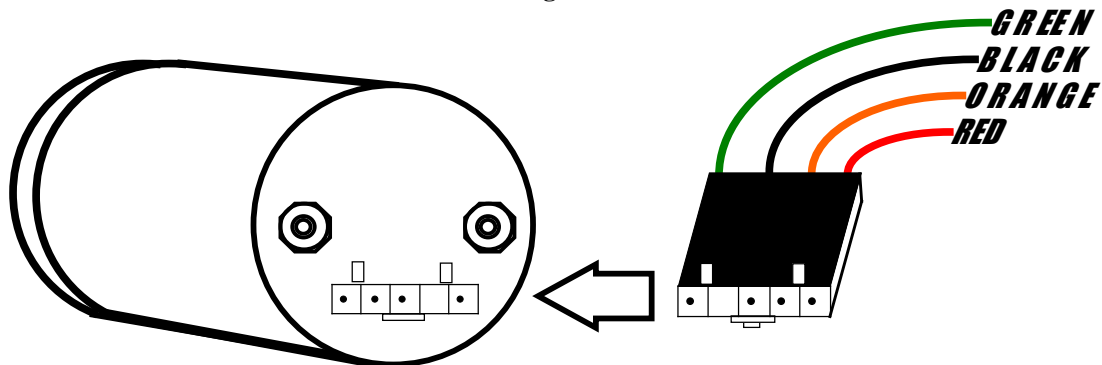

**Tech Support Dept.
856.768.8300 Ext. 2
Techsupport@GlowShift.com
150 Cooper Ste: B-4 Berlin, NJ 08091**

Limited Warranty and Disclaimer

All GlowShift products come with a one year limited warranty on the internal parts of the product. This warranty runs from the date of purchase. GlowShift will replace or repair any qualifying defective product received by the company before the end of the warranty period. Installation of this product must be performed by a licensed professional. Should the failure of the product be the result of damage occurring as a result of improper installation, alteration of the product or an act or omission on the part of the consumer, this warranty is void. GlowShift shall not be responsible for any consequential damages which arise from the use and/or installation of the product. If the kit is installed in any manner other than specified, GlowShift reserves the right to deny any warranty claims at the discretion of the technical support department. The one year warranty is not transferable. Any product return must include the original packaging, a statement of the alleged defect and an RMA number. Upon receipt of the returned product, the company will test the product for defect. If the results of the testing do not support the warranty claim, do not reveal any defect or indicate consumer negligence in the installation and handling of the product, then the product will be returned to you and you will be charged a reshipping fee. If the product is returned from an address within the continental United States, within the first 14 days after purchase, and is found to be defective, GlowShift Lighting will reimburse to the consumer the cost of the return shipping. This offer does not extend to the cost for shipping charges on any international packages. GlowShift is a brand of The Neon Edge, Inc.

Additional Disclaimer Terms

- Improper installation of electricity-using products such as lighting may cause damage to any vehicle or device to which the improperly handled or installed lighting is attached.
- Improperly installed product may cause electrical injury to persons.
- It is recommended that the kit be installed by a licensed professional.
- GlowShift assumes no liability for the installation of the product.
- Warranty or liability will not exceed the product purchase price which shall be buyers sole and exclusive remedy.

THERE ARE NO WARRANTIES WHICH EXTEND BEYOND THE WARRANTIES DESCRIBED ON THE FACE HEREOF INCLUDING ANY IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. (GLOWSHIFT AT IT'S DISCRETION, MAY PROVIDE REMEDY OF RETURN OF PURCHASE PRICE OR REPAIR OR REPLACEMENT OF DEFECTIVE PRODUCT AS BUYERS SOLE AND EXCLUSIVE REMEDY.)

150 Cooper Road - Suite B-4 West Berlin, NJ 08091